

H : 100Nm³/h, 35barg, AEM Nexus 500 500
99.95% 99.999%) 200



H 额定流量

H 出口压力

H 纯度

:

H 纯度 (选用干燥器)

:

H 出口温度

O 额定流量

额定功率损耗

电压


频率

H O正常消耗

入口质量

H O入口温度

运行灵活性

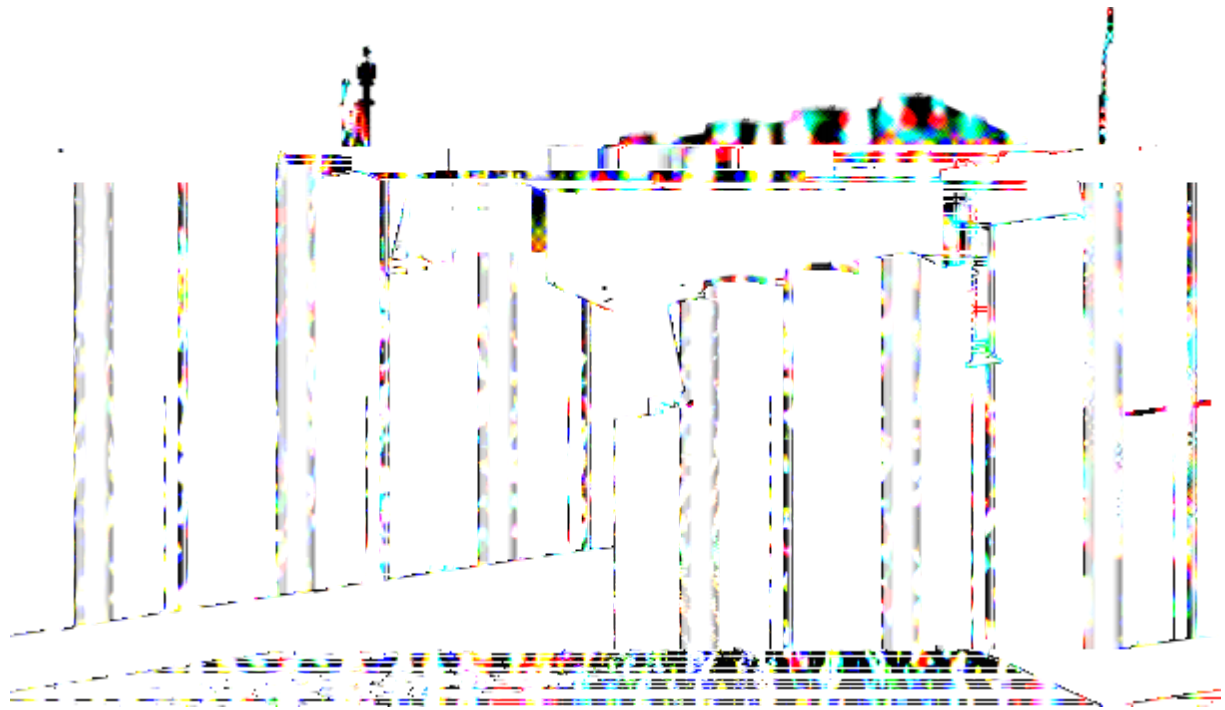

H : 200Nm³/h, 35barg, AEM Nexus 1000
99.95% (99.999%)



H 额定流量

H 出口压力

H 纯度

H

,

:

H 纯度 (选用干燥器)

:
